

Model SP-005POE-RJ45/8-24 24-Ch PoE Surge Protector Product Datasheet






SP-005POE-RJ45/8-24 is 24-channel PoE surge protector. It is widely used for lightning and overvoltage protection, lightning and overvoltage invade into the devices along the network cable in telecom, communication, traffic, petrochemical and industrial control system. It can support IEEE 802.3af/at standard 1000Mbps network devices, such as network switches, server, router, MODEM, PC and so on, it can be directly installed in network cabinet.

Features

- ◆Compatible for 10/100/1000Mbps network and power
- ◆ Support 1, 2, 3, 6 or 4, 5, 7, 8 power line protected at the same time
- ◆ Reasonable circuit design, very low insertion loss
- ◆ Special signal isolation technology, reduce network devices strike from surge

Dimension

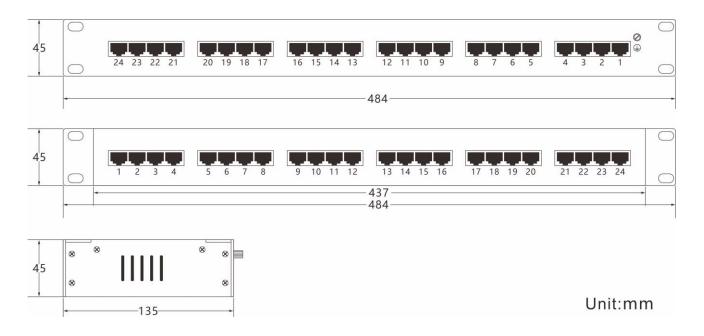

Note: Dimension error value ±1 mm


sales@ourten.com 2 www.ourten.com



Technical Parameter


Category	Description	
Signal Type	Network	Power
Interface Type	RJ45	
Working Voltage (Un)	6/12V	48V
Max. Continuous Operating Voltage (Uc)	≤20V	≤60V
Voltage protection level (Up @line-line)	20V@ 3kV (1.2/50)	60V@ 3kV (1.2/50)
Voltage protection level (Up @line-GND/PE)	800V@ 3kV (1.2/50)	
Nominal Discharge Current (In @8/20µs)	5kA	
Max. Discharge Current (Imax @8/20μs)	10kA	
Surge Life at 0.5kA (8/20µs)	>2000 events	
Bandwidth (3dB) per pair	250MHz	
Return Loss (100 Ω)	-16dB	
Lightning protection	10kV@8/20μs, 10kV@10/700μs	
Transmission Rate (Mbps)	1000x24 port	
Response Time (ns)	≤1	≤25
Insert Loss (dB)	≤0.2	
Working Temperature	-40℃~+80℃	
Working Humidity	<95% Non-condensation	
Net Weight (kg)	2	

Installation Diagram

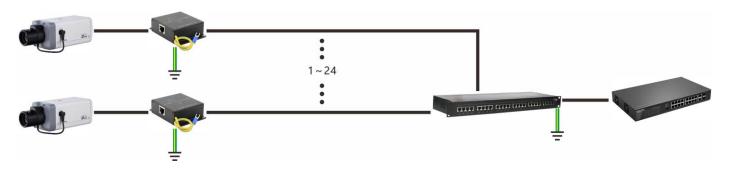



Installation Instructions

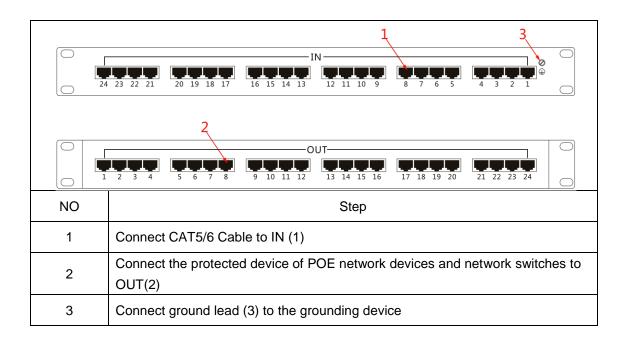



Shaoxing Ourten Electronics Co., Ltd.

#1 Liando U Valley, No. 1999 Wuxing West Road, Shangyu, Zhejiang, China

Tel: +86-21-5888 9980 (+86-575-8213 7256); Fax: +86-575-8212 7256

Email: sales@ourten.com

www.ourten.com

Thank you for choosing Ourten!