



Model SP-M40-385-4P

3-Phase Power Surge Protection Module

Product Datasheet




www.ourten.com

SP-M40-385-4P is 3-Phase Power Surge Protection Module. It is widely used to protect power distribution stations, rooms, cabinets, AC or DC power distribution panels, switch boxes, and various other important equipment vulnerable to lightning.

Features

- ◆ Max. discharge current 40kA for three-phase power protection
- ◆ Modular design with performance status display
- ◆ High discharge capacity, low residual voltage and fast response time
- ◆ Built-in varistor discharge material for long service life

Dimension

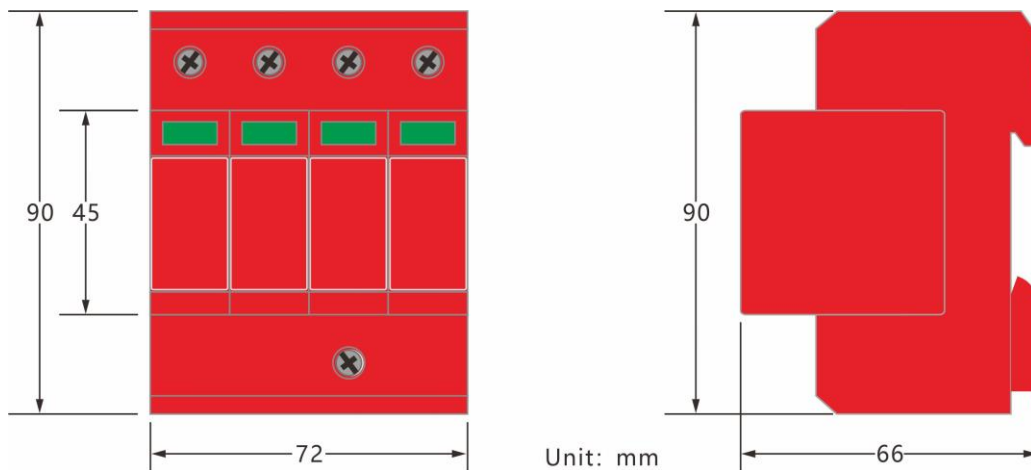


Note: Dimension error value ± 1 mm


Technical Parameter

Category	Description
SPD according to EN 61643-11 / IEC 61643-11	type 2 + type 3 / class II + class III
IEC power supply system	TN-S
Nominal Voltage (a.c.) (Un)	380V (50/60 Hz)
Max. Continuous Operating Voltage (a.c.) (Uc)	385V (50/60 Hz)
Nominal Discharge Current In (8/20 μ s)	20kA
Maximum Discharge Current I _{max} (8/20 μ s)	40kA
Voltage protection level [L-PE]/[N-PE] (Up)	1.8kV
Response Time (ns)	<25
The Nominal Value of Protective Fuse	80A gL/gG
Temporary Overvoltage (TOV) (UT) – Characteristic	440 V / 120 min. – safe failure
Working Temperature	-40°C ~ +80°C
Weight (g)	395
Mounting type	DIN rail: 35 mm
Degree of Protection	IP20

Installation Diagram

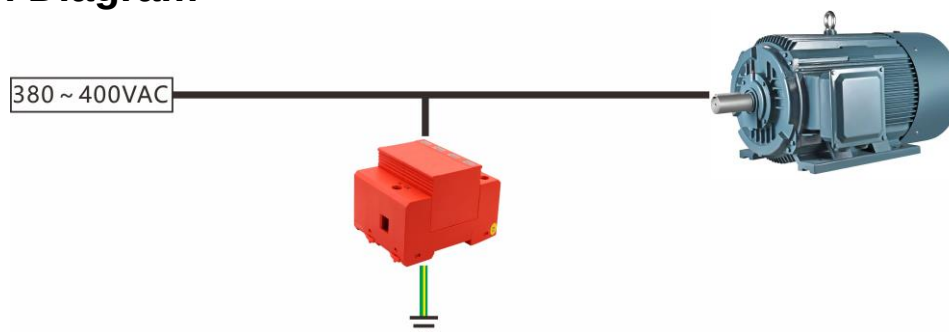

Installation Instructions

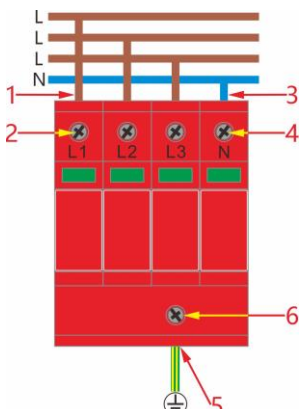	No	Step
	1	Put the wire L of three-phase power line in the screw clip (1)
	2	Turn the nut clockwise, and fix the wire (2)
	3	Put the wire N of three-phase power line in the screw clip (3)
	4	Turn the nut clockwise, and fix the wire (4)
	5	Put the ground lead in the crew clip (5)
	6	Turn the nut clockwise, and fix the wire (6)



Shaoxing Ourten Electronics Co., Ltd.

#1 Liando U Valley, No. 1999 Wuxing West Road, Shangyu, Zhejiang, China

Tel: +86-21-5888 9980 (+86-575-8213 7256); Fax: +86-575-8212 7256

Email: sales@ourten.com

www.ourten.com

Thank you for choosing Ourten!